


**EXAMPLE IS FOR DEMONSTRATION PURPOSES ONLY.**

DESIGN, MATERIALS & METHODS OF CONSTRUCTION VARY CONSIDERABLY WITH EACH PROJECT, AS ALLOWED BY THE MINNESOTA STATE BUILDING CODE. EACH WALL CONDITION MUST BE SHOWN, DEMONSTRATING SPECIFIC ASPECTS OF EACH INDIVIDUAL PROJECT.

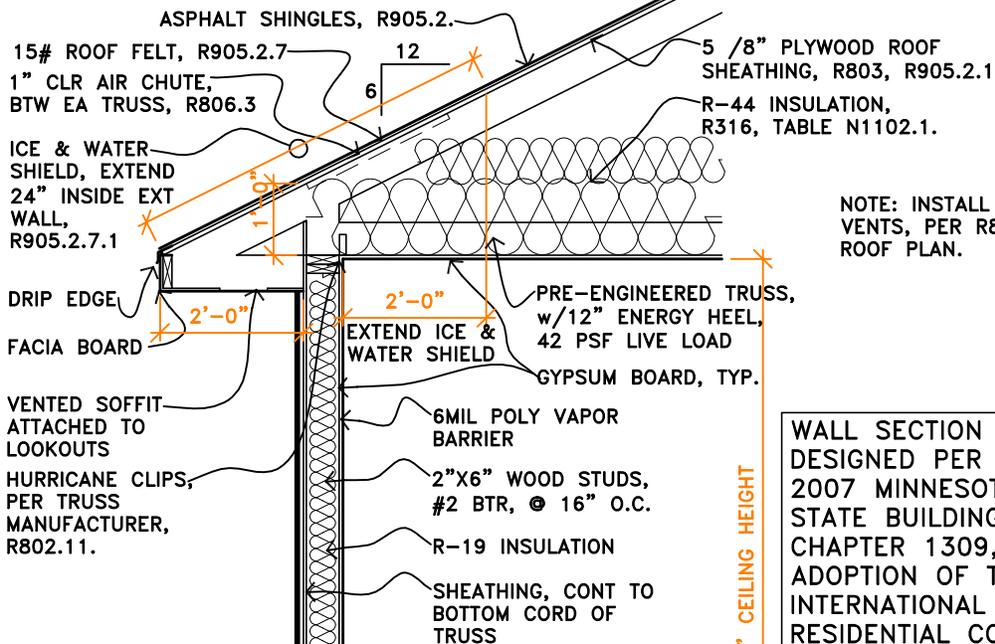

NOTE: INSTALL ROOF VENTS, PER R806, SEE ROOF PLAN.

WALL SECTION DESIGNED PER THE 2007 MINNESOTA STATE BUILDING CODE, CHAPTER 1309, ADOPTION OF THE INTERNATIONAL RESIDENTIAL CODE.

ALWAYS SHOW SIZE, SPACING, SPECIFIC MATERIALS & ALL OTHER COMPONENTS OF YOUR PROJECT.

AS A GENERAL RULE, IF YOU INTEND TO BUILD IT, SHOW IT ON THE PLANS! THIS INFORMATION WILL BE REVIEWED FOR BUILDING CODE COMPLIANCE, AND YOUR PROJECT WILL BE OFF TO A GOOD START.

NOTE: RADON MITIGATION SYSTEM TIED INTO FLOOR DRAINS AND SUMP. SEE FLOOR PLAN FOR ADD'L RADON MITIGATION INFORMATION.


NOTE: FOOTINGS ALL LOCATIONS 60" MINIMUM BELOW GRADE.

NOTE: FOUNDATION WALL STEPS TO A CANTILEVERED FOUNDATION WALL, SEE ADDITIONAL WALL SECTION.

NOTE: ALL REINFORCING STEEL 60 KSI MIN (GRADE 60).

NOTE: FOOTING & FOUNDATION WALL CONCRETE 3000 PSI MIN. BASEMENT SLAB 2500 PSI MIN, R402.2.

NOTE: SOIL BEARING IS ASSUMED TO BE 1500 PSF, UNLESS CERTIFIED SOIL TEST IS PROVIDED.

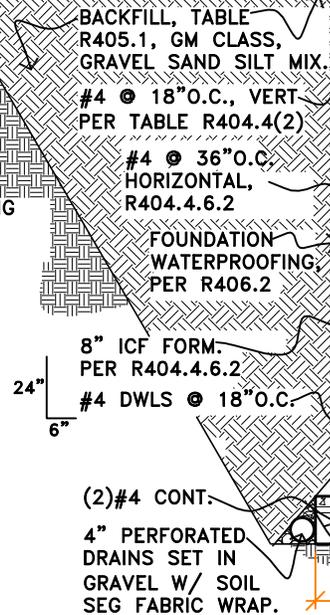

# EXAMPLE WALL SECTION NOT FOR CONSTRUCTION

SCALE: 3/8" = 1'-0"

Date: 3/3/2011  
 Job No.: HANDOUTS  
 Drawn By: RDA  
 Revised: 4/20/2012  
 Approved By: DWN  
 Sheet:

