


GlasWerks® LED
Prague®

DESIGNER
OUTDOOR

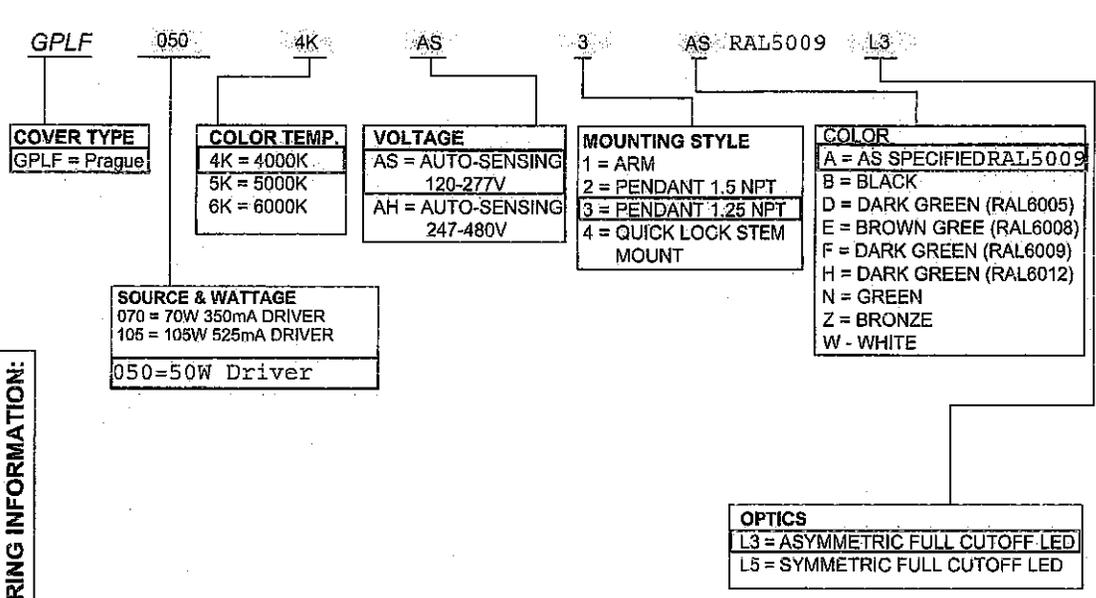

HoloPhane Nomenclature:
GPLF 050 4K AS 3 A (RAL5009) L3 D DM DG RFD0515

- OPTIONS:**
- D = ROAM 0-10V DIMMING CONTROL
 - B = BI-LEVEL 0-10V DIMMING CONTROL
 - H = NEMA TWISTLOCK PHOTOCONTROL RECEPTACLE ONLY
 - DM = 0-10V DIMMING
 - PCS = DTL TWISTLOCK PHOTOCONTROL 120-277 VOLT
 - P34 = DTL TWISTLOCK PHOTOCONTROL 347V
 - P48 = DTL TWISTLOCK PHOTOCONTROL 480 VOLT
 - PSC = SHORTING CAP
 - L03 = 3 FEET OF PREWIRED LEADS
 - L10 = 10 FEET OF PREWIRED LEADS
 - L20 = 20 FEET OF PREWIRED LEADS
 - L25 = 25 FEET OF PREWIRED LEADS
 - L30 = 30 FEET OF PREWIRED LEADS
 - DG=Diffuse Glass Lens

- ACCESSORIES:**
- SPDPLUGIN = REPLACEMENT SURGE PROTECTOR 120-277V
 - SPDPLUGIN-48 = REPLACEMENT SURGE PROTECTOR 347-480V

THIS DRAWING, WHEN APPROVED, SHALL BECOME THE COMPLETE SPECIFICATION FOR THE MATERIAL TO BE FURNISHED BY HOLOPHANE. IT IS THE BUYER'S RESPONSIBILITY TO OBTAIN ALL NECESSARY PERMITS, APPROVALS, AND REGULATORY REQUIREMENTS. HOLOPHANE SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THIS PRODUCT. HOLOPHANE SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THIS PRODUCT. HOLOPHANE SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THIS PRODUCT.

ORDER #:	
TYPE:	
DRAWN: KRW	
DATE: 4/18/13	
DWG #: LUM_GPLF	
1 of 2	

Specifications

GENERAL DESCRIPTION

The Euro styled luminaire consists of a LED flat glass optical assembly shielded by a decorative formed reflector and a top mounted cast aluminum electrical assembly with a circumferential 1.50 inch reveal.

OPTICAL ASSEMBLY

The optical assembly consists of a thermal resistant flat glass panel mechanically held in a formed aluminum door frame. The door frame is attached to the spun cover with set screws. Light from the LED module is distributed by precisely molded optical interface to maximize utilization, uniformity and luminaire spacing. Two LED boards are available for symmetrical or asymmetric distribution.

ELECTRICAL ASSEMBLY

The cast aluminum electrical housing, has a smooth domed contour. A terminal block is provided with a quick disconnect receptacle. The electrical housing is hinged with a tool-less latch to provide easy access to the gear assembly. The unitized electrical assembly, containing the electronic driver and other electrical components, plugs into the quick disconnect receptacle. The pendant mount version has either a 1.50 inch NPT and stainless steel set screw or a welded stem. The stem aides in installation speed. Provided with a (3) station terminal block that accepts #14 through #2 wires and has a quick disconnect harness with removable electrical module. The arm mount version is provided with two U-bolts with washers and nuts and two leveling set screws that lock the housing to a 2 inch nominal (2-3/8" O.D.) horizontal arm and allow a +/- 5 degree adjustment from horizontal to the cover.

ELECTRICAL DRIVER

(Refer to the drive specification sheet for operating characteristics)

FINISH

The luminaire is finished with polyester powder paint to insure maximum durability.

LISTING

The luminaire is CSA listed as suitable for wet locations up to 40° C ambient temperature. IP rated.

WARRANTY

Limitted warranty located at
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE

Actual performance may differ as a result of end-user environment and application.

Actual wattage may differ by +11% / -6% when operating between 120-480V +/- 10%.

Specification subject to change without notice.

GlasWerks® LED
Prague®

DESIGNER
 OUTDOOR



THE DRAWING, WHEN APPROVED, SHALL BECOME THE COMPLETE SPECIFICATION FOR THE MATERIAL TO BE FURNISHED BY HOLOPHANE. NO CHANGES WILL BE MADE TO THIS DRAWING WITHOUT THE WRITING OF HOLOPHANE. THIS DRAWING IS THE PROPERTY OF HOLOPHANE AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON EXPRESS CONDITION THAT IT WILL NOT BE USED SEPARATELY OR IN CONNECTION WITH MATERIAL FURNISHED BY HOLOPHANE.

ORDER #:	
TYPE:	
DRAWN: KRW	
DATE: 4/18/13	
DWG #: LUM_GPLF	